



product
catalogue

February 2026

Disclaimer

Products manufactured and systems designed by Etex Australia Pty Ltd and branded Siniat, are produced in accordance with the Building Code of Australia and relevant Australian Standards. Information in this document is to be used as a guide only and is subject to project approval as many aspects of construction are not comprehensively covered. It is also the responsibility of the project to determine if our products and systems are suitable for the intended application and they meet the relevant building code and project requirements. Etex Australia Pty Ltd will not be held responsible for any claims resulting from the installation of its products or other associated products not in accordance with the recommendations of the manufacturer's technical literature or relevant Australian Standards, or for situations not covered by our certification reports.

Siniat technical information is regularly updated. To ensure this document is current with the latest information, visit:

www.siniat.com.au

or contact Siniat's Customer Service Centre on

1300 724 505

Warranty

Siniat products are covered by a 10 Year Warranty.

Visit

www.siniat.com.au/warranty

Version 12
February 2026



about us

Siniat is a flagship commercial brand of Etex - a global leader in lightweight construction. Siniat is a leading global manufacturer of interior and exterior materials for drywall construction and in Australia provides steel framing, plasterboard, compounds, cornice and associated products and systems to the building industry.

In Australia, Siniat products are manufactured in Matraville (NSW), Melbourne (VIC), Bundaberg (QLD), Brisbane (QLD) and Perth (WA). Products and systems are supplied to the building industry through Siniat's national distribution network of PlastaMasta and other independently owned stores.

The Siniat brand is trusted around the world for its effectiveness in the building of quality living and working spaces, by specialising in smart solutions for lightweight construction systems.

Siniat's wide range of quality wall and ceiling lining products and systems are developed and designed to reduce risk and enhance performance. They provide compliant, reliable, innovative and sustainable solutions to all construction projects. Their product offering is backed by comprehensive technical support and professional collaboration with customers.

A wide range of plasterboard and metal framing products can be supplied carbon neutral under the Siniat Opt2Act program. Opted-in products are supplied carbon neutral, certified by Climate Active. A wide range of plasterboard products have also been certified GreenRate Level A under the Global GreenTag's certification scheme, and EPDs are available for locally made plasterboard and metal framing products.














For more information about our products and systems and for detailed construction details, download the Blueprint Technical Manual.

contents

| | |
|-----------------------------------|-----------|
| 1 about us | 1 |
| 2 sustainability | 3 |
| 3 products | 5 |
| metal framing | 5 |
| access panels | 30 |
| plasterboard | 31 |
| cornice | 35 |
| compounds | 37 |
| adhesives & sealants | 40 |
| 4 systems | 41 |
| Weather Defence® | 41 |
| x-ray shielding system | 42 |
| interhome and interhome high-rise | 43 |
| createx® system | 44 |
| creason® system | 45 |

product properties

| | |
|--|--|
|  Water Resistant |  X-Ray Resistant |
|  Fire Resistant |  Sound Absorbing |
|  Impact Resistant |  Interior Design |
|  Sound Resistant |  Mould Resistant |
|  Vapour Permeable |  External Sheathing |
|  Superior Impact Resistance | |

how Siniat can help you meet **sustainability** goals

At Siniat our business actions are guided by a true and ongoing commitment to sustainability.

We prioritise the safety of our employees and customers and are investing in multiple strategies to reduce the environmental impact of our manufacturing processes.

Whether you are looking to reduce the upfront carbon of your next project, need eco-labelled products or EPDs that can contribute to Green Star points, Siniat has solutions that can help.

how Siniat can help you meet **sustainability goals**

Amplify your climate ambition with Opt2Act®

Siniat's Opt2Act carbon neutral program offers a simple and cost-effective way to reduce the upfront carbon emissions of your build by up to 7%.

To utilise the Opt2Act program, architects or project procurement managers specify Siniat Opt2Act materials at the design stage. Siniat then works with the distributor who delivers the products to the project site, determining the quantities of materials used and procures offsets eligible under the Climate Active Carbon Neutral Standard that also meet Siniat's offsets strategy.

The Opt2Act program is available for a wide range of locally made plasterboard and metal framing products. Opted-in products are certified carbon neutral under Climate Active.

Etex and Siniat are committed to a carbon neutral future. By 2030, Siniat aims to reduce GHG emissions intensity for Scope 1 and 2 emissions by 35% compared with 2018 baseline and we have taken a cradle-to-grave approach, including Scope 3 emissions, in formulating our emissions reductions strategy.

Globally Etex sees sustainability as key to reshaping the future construction. The Etex ambition is to help transform the industry by continuously striving to build safer and healthier workplaces, being socially inclusive by providing equal opportunities for all, caring about our environmental impact with circular business models and advancing in climate change mitigation and adaptation in line with urgent global needs.

To find out more about Siniat's **Opt2Act** program visit our website or send an email to opt2act@siniat.com.au.



EPDs

As the awareness of sustainable building products and practices grows, more customers request EPDs during all stages of the construction process. Siniat has answered the call by creating registered EPDs (environmental product declarations) for a wide range of our plasterboard and steel framing products.

At Siniat we regard EPDs as an important part of our commitment to being a sustainable manufacturer. Many manufacturers make sustainability claims, but only an EPD can provide accurate, transparent and verified information about a product. EPDs allow customers to access comparable data, and to gain insight into all the relevant environmental information about the product's life-cycle environmental impact.

EPDs also support project teams meeting requirements for product documentation for rating tools including the Green Building Council of Australia's Green Star certification scheme.

Our EPDs are based on ISO Standard 14025 and the scientific principles of lifecycle assessment (LCA) and are available for download from our website.



GreenTag certification

Siniat offers a range of plasterboard products certified by Global GreenTag to GreenRate Level A, including the **shield** plasterboard range and technical and specialty board products such as **trurock**, **trurock hd** and **opal**.

Siniat's independently certified plasterboard products can achieve 100% Green Star points for sustainable building projects, and do not require further documentation to be submitted for the materials category of Green Star ratings tools. Our wide range of certified products means that efficient selections can be made for any project, from affordable housing through to high end public spaces.

Let's talk! To find out more about Siniat's sustainability offering, contact us on **1300 724 505** or email opt2act@siniat.com.au




wall framing systems

wall framing systems - stud, track, dh track, track flexible, nogging track

Siniat wall framing components are manufactured at our advanced production facility in Beenleigh, Brisbane, using Australian-made coiled steel with an AM150 coated alloy magnesium finish, specifically designed for enhanced corrosion resistance. Our light gauge steel frame components are engineered to meet Australian Standards and the requirements of the BCA (Building Code of Australia), ensuring durability and reliable performance.

stud

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|---------|---|--------------|----------|-------------|-----------------|--------------|
| stud 51 |  | 51 | 0.5 | 2400 | 1.24 | WSL51-050-24 |
| | | | | 2700 | 1.39 | WSL51-050-27 |
| | | | | 3000 | 1.55 | WSL51-050-30 |
| | | | | 3600 | 1.86 | WSL51-050-36 |
| stud 64 |  | 64 | 0.5 | 2400 | 1.36 | WSL64-050-24 |
| | | | | 2700 | 1.53 | WSL64-050-27 |
| | | | | 2800• | 1.58 | WSL64-050-28 |
| | | | | 3000 | 1.70 | WSL64-050-30 |
| | | | | 3600 | 2.04 | WSL64-050-36 |
| | | | | 4200 | 2.38 | WSL64-050-42 |
| | | | | 4800 | 2.72 | WSL64-050-48 |
| | | | | 6000 | 3.39 | WSL64-050-60 |
| | | | 0.75 | 2400• | 2.00 | WSL64-075-24 |
| | | | | 2700 | 2.25 | WSL64-075-27 |
| | | | | 3000 | 2.50 | WSL64-075-30 |
| | | | | 3600 | 3.00 | WSL64-075-36 |
| | | | | 4200 | 3.50 | WSL64-075-42 |
| | | | | 4800 | 3.51 | WSL64-075-48 |
| | | | | 6000 | 5.00 | WSL64-075-60 |
| | | | 1.15 | 2400• | 3.02 | WSL64-115-24 |
| | | | | 2700 | 3.40 | WSL64-115-27 |
| | | | | 3000 | 3.78 | WSL64-115-30 |
| | | | | 3600 | 4.53 | WSL64-115-36 |
| | | | | 4200 | 5.29 | WSL64-115-42 |
| 4800 | 6.05 | WSL64-115-48 | | | | |
| 6000 | 7.56 | WSL64-115-60 | | | | |


• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



wall framing systems

stud

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/ piece | short code |
|---------|--|------------|----------|-------------|------------------|--------------|
| stud 76 |  | 76 | 0.55 | 2400 | 1.66 | WSL76-055-24 |
| | | | | 2700 | 1.87 | WSL76-055-27 |
| | | | | 3000 | 2.08 | WSL76-055-30 |
| | | | | 3600 | 2.49 | WSL76-055-36 |
| | | | | 4200 | 2.91 | WSL76-055-42 |
| | | | | 4800 | 3.32 | WSL76-055-48 |
| | | | | 6000• | 4.15 | WSL76-055-60 |
| | | | 0.75 | 2400• | 2.23 | WSL76-075-24 |
| | | | | 2700 | 2.41 | WSL76-075-27 |
| | | | | 3000 | 2.68 | WSL76-075-30 |
| | | | | 3600 | 3.22 | WSL76-075-36 |
| | | | | 4200 | 3.76 | WSL76-075-42 |
| | | | | 4800 | 4.46 | WSL76-075-48 |
| | | | | 6000 | 5.58 | WSL76-075-60 |
| | | | 1.15 | 2400• | 3.38 | WSL76-115-24 |
| | | | | 2700 | 3.80 | WSL76-115-27 |
| | | | | 3000 | 4.22 | WSL76-115-30 |
| | | | | 3600 | 5.07 | WSL76-115-36 |
| | | | | 4200 | 5.91 | WSL76-115-42 |
| | | | | 4800 | 6.76 | WSL76-115-48 |
| | | | | 6000 | 8.45 | WSL76-115-60 |


• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



wall framing systems

stud

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|---------|--|------------|----------|-------------|-----------------|--------------|
| stud 92 |  | 92 | 0.55 | 2400 | 1.80 | WSL92-055-24 |
| | | | | 2700 | 2.03 | WSL92-055-27 |
| | | | | 3000 | 2.25 | WSL92-055-30 |
| | | | | 3600 | 2.70 | WSL92-055-36 |
| | | | | 4200 | 3.15 | WSL92-055-42 |
| | | | | 4800 | 3.61 | WSL92-055-48 |
| | | | | 6000 | 4.51 | WSL92-055-60 |
| | | | 0.75 | 2400• | 2.42 | WSL92-075-24 |
| | | | | 2700 | 2.73 | WSL92-075-27 |
| | | | | 3000 | 3.03 | WSL92-075-30 |
| | | | | 3600 | 3.64 | WSL92-075-36 |
| | | | | 4200 | 4.24 | WSL92-075-42 |
| | | | | 4800 | 4.85 | WSL92-075-48 |
| | | | | 6000 | 6.06 | WSL92-075-60 |
| | | | 1.15 | 2400 | 3.67 | WSL92-115-24 |
| | | | | 2700 | 4.13 | WSL92-115-27 |
| | | | | 2800 | 4.27 | WSL92-115-28 |
| | | | | 3000 | 4.58 | WSL92-115-30 |
| | | | | 3600 | 5.50 | WSL92-115-36 |
| | | | | 4200 | 6.42 | WSL92-115-42 |
| | | | | 4800 | 7.34 | WSL92-115-48 |
| | | | | 6000 | 9.17 | WSL92-115-60 |
| | | | 7200• | 11.00 | WSL92-115-72 | |


• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



wall framing systems

stud

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|----------|---|------------|----------|-------------|-----------------|---------------|
| stud 150 |  | 150 | 0.75 | 2700• | 3.75 | WSL150-075-27 |
| | | | | 3000 | 4.17 | WSL150-075-30 |
| | | | | 3600 | 5.00 | WSL150-075-36 |
| | | | | 4200• | 5.84 | WSL150-075-42 |
| | | | | 4800 | 6.67 | WSL150-075-48 |
| | | | | 6000 | 8.34 | WSL150-075-60 |
| | | | | 7200• | 10.00 | WSL150-075-72 |
| | | | | 1.15 | 2700• | 5.68 |
| | | | 3000 | | 6.31 | WSL150-115-30 |
| | | | 3600 | | 7.57 | WSL150-115-36 |
| | | | 4200• | | 8.83 | WSL150-115-42 |
| | | | 4800 | | 10.09 | WSL150-115-48 |
| | | | 6000 | | 12.61 | WSL150-115-60 |
| | | | 7200• | 15.14 | WSL150-115-72 | |






• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



wall framing systems

track

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|-----------|---|------------|----------|-------------|-----------------|-------------|
| track 51 |  | 51 | 0.5* | 3000 | 1.45 | T51-050-30 |
| | | | 0.7• | 3000 | 2.30 | T51-070-30 |
| track 64 |  | 64 | 0.5* | 3000 | 1.50 | T64-050-30 |
| | | | 0.5* | 3600 | 1.80 | T64-050-36 |
| | | | 0.7 | 3000 | 2.20 | T64-070-30 |
| | | | 1.15 | 3000 | 3.33 | T64-115-30 |
| track 76 |  | 76 | 0.5* | 3000 | 1.86 | T76-050-30 |
| | | | 0.5* | 3600 | 2.23 | T76-050-36 |
| | | | 0.7 | 3000 | 2.79 | T76-070-30 |
| | | | 1.15 | 3000 | 3.33 | T76-115-30 |
| track 92 |  | 92 | 0.5* | 3000 | 2.08 | T92-050-30 |
| | | | 0.5* | 3600 | 2.49 | T92-050-36 |
| | | | 0.7 | 3000 | 2.79 | T92-070-30 |
| | | | 1.15 | 3000 | 4.11 | T92-115-30 |
| track 150 |  | 150 | 0.75 | 3000 | 3.85 | T150-075-30 |
| | | | 1.15 | 3000 | 5.84 | T150-115-30 |

Pre-punched oversized fastener holes available in 1.15BMT upon request - lead times apply.



* The Siniat safety lip is designed and manufactured for improved health and safety during handling.






• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



wall framing systems

dh track

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--------------|---|------------|----------|-------------|-----------------|---------------|
| dh track 51 |  | 51 | 0.55* | 3000 | 2.11 | DHT51-055-30 |
| | | | 0.70• | 3000 | 2.79 | DHT51-070-30 |
| dh track 64 |  | 64 | 0.55* | 3000 | 2.21 | DHT64-055-30 |
| | | | 0.70 | 3000 | 2.98 | DHT64-070-30 |
| | | | 1.15 | 3000 | 3.78 | DHT64-115-30 |
| dh track 76 |  | 76 | 0.55* | 3000 | 2.32 | DHT76-055-30 |
| | | | 0.70 | 3000 | 2.98 | DHT76-070-30 |
| | | | 1.15 | 3000 | 4.50 | DHT76-115-30 |
| dh track 92 |  | 92 | 0.55* | 3000 | 2.59 | DHT92-055-30 |
| | | | 0.70 | 3000 | 3.49 | DHT92-070-30 |
| | | | 1.15 | 3000 | 5.17 | DHT92-115-30 |
| dh track 150 |  | 150 | 0.75 | 3000 | 4.48 | DHT150-075-30 |
| | | | 1.15 | 3000 | 6.78 | DHT150-115-30 |

Pre-punched oversized fastener holes available in 1.15BMT upon request - lead times apply.



*The Siniat safety lip is designed and manufactured for improved health and safety during handling.







• Minimum order quantities and lead times may apply.


Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.

wall framing systems


slotted dh track

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|----------------------|--|------------|----------|-------------|-----------------|----------------|
| dh track 64 slotted |  | 64 | 0.75 | 3000 | 2.64 | SDHT64-075-30 |
| | | | 1.15 | 3000 | 4.06 | SDHT64-115-30 |
| dh track 76 slotted |  | 76 | 0.75 | 3000 | 2.71 | SDHT76-075-30 |
| | | | 1.15 | 3000 | 4.31 | SDHT76-115-30 |
| dh track 92 slotted |  | 92 | 0.75 | 3000 | 3.10 | SDHT92-075-30 |
| | | | 1.15 | 3000 | 4.78 | SDHT92-115-30 |
| dh track 150 slotted |  | 150 | 1.15 | 3000 | 6.20 | SDHT150-115-30 |

acoustic stud

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|---------------|---|------------|----------|-------------|-----------------|-------------|
| acoustic stud |  | 92 | 0.55 | 2400• | 2.48 | AS92-055-24 |
| | | | | 2700 | 2.79 | AS92-055-27 |
| | | | | 3000 | 3.10 | AS92-055-30 |
| | | | | 3600 | 3.72 | AS92-055-36 |
| | | | | 4200 | 4.34 | AS92-055-42 |
| | | | | 4800• | 4.96 | AS92-055-48 |
| | | | | 6000• | 6.20 | AS92-055-60 |

track flexible

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|----------------|---|------------|----------|-------------|-----------------|--------------|
| track flexible |  | 64 | 0.55 | 2400 | 2.22 | TFLEX64-2400 |
| | | 76 | 0.55 | 2400 | 2.39 | TFLEX76-2400 |
| | | 92 | 0.75 | 2400 | 2.58 | TFLEX92-2400 |


• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.





wall framing systems


nogging track

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/ piece | hole spacing (α) | short code |
|------------------------|---|------------|----------|-------------|------------------|------------------|--------------------|
| nogging track 64 |  | 64 | 0.7 | 3670 | 2.36 | 450 | NT64-450-3670 |
| | | | | | 2.39 | 600 | NT64-600-3670 |
| | | | | | 1.15• | 3.43 | 450 |
| nogging track 76 |  | 76 | 0.7 | 3670 | 2.54 | 450 | NT76-450-3670 |
| | | | | | 2.58 | 600 | NT76-600-3670 |
| | | | | | 1.15• | 3.89 | 450 |
| nogging track 92 |  | 92 | 0.7 | 3670 | 2.75 | 300 | NT92-300-3670 |
| | | | | | 2.82 | 400 | NT92-400-3670 |
| | | | | | 2.90 | 450 | NT92-450-3670 |
| | | | | | 2.98 | 600 | NT92-600-3670 |
| | | | | | 1.15• | 4.37 | 450 |
| nogging track 150 |  | 150 | 0.7 | 3670 | 4.73 | 600 | NT92-115-600-3670 |
| | | | | | 3.90 | 450 | NT150-450-3670 |
| | | | | | 4.03 | 600 | NT150-600-3670 |
| | | | | | 1.15• | 6.01 | 450 |
| timber nogging bracket |  | 38 | 0.7 | 2400 | 1.63 | N/A | TH38/19-070-24 |
| | | | | | 6.25 | 600 | NT150-115-600-3670 |

panel track

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|----------------|---|------------|----------|-------------|-----------------|--------------|
| panel track 64 |  | 64 | 1.15• | 3000 | 4.58 | SPT64-115-30 |
| panel track 76 |  | 76 | | | 5.17 | SPT76-115-30 |

dropper bracket

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|-----------------------------|---|------------|----------|-------------|-----------------|------------|
| dropper bracket (bag of 50) |  | 80 | 3.0 | 65 | 0.20 | DB |




• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.

opening framing components

opening framing components - jamb 92, universal bracket, jamb stud connector bracket

These products form part of the Siniat Header Jamb Framing System. The system is primarily used for door and window openings, and saves the time and materials associated with boxed studs. It is also commonly used in external wall frame designs, particularly when tall wall heights are involved.

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--|---|------------|----------|-------------|-----------------|-------------|
| jamb stud |  | 92 | 1.50 | 2800 | 8.25 | JS92-150-28 |
| | | | | 3000 | 8.83 | JS92-150-30 |
| | | | | 3600 | 10.68 | JS92-150-36 |
| universal brackets (bag of 50) |  | 60 | 2.0 | 60 | 0.15 | UB60 |
| | | | | | | |
| jamb stud connector bracket (bag of 50) |  | 90 | 2.0 | 38 | 0.15 | JSCB |

anchor range

anchor range - screw anchor

Designed for use with Siniat's steel wall framing and ceiling frame systems, the Siniat screw anchor range has been purpose made to provide a complete framing solution from one manufacturer with full certification. Our screw anchors are an integral part of achieving the full Siniat system performance.

screw anchor

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--|---|------------|----------|-------------|-----------------|------------|
| screw anchor 6x45mm (box of 100) |  | 6 | n/a | 45 | 0.018 | SA6X45 |
| screw anchor 6x60mm (box of 100) |  | 6 | n/a | 60 | 0.019 | SA6X60 |
| screw anchor 8x65mm (box of 50) |  | 8 | n/a | 65 | 0.037 | SA8X65 |

• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



external cladding components

top hat, top hat cleats, strip, flash, accessories

top hat

| name | image | width (mm) | leg height (α) (mm) | bmt (mm) | length (mm) | approx kg/ piece | short code | | | | |
|------------|-------------------------|-------------------|---------------------|----------------|----------------|------------------|----------------|----------------|----------------|----------------|-------------------|
| top hat 50 | <p>l = 15mm minimum</p> | 50 | 15 | 0.75 | 3600 | 2.40 | TH50/15-075-36 | | | | |
| | | | | | 3600 | 3.33 | TH50/15-115-36 | | | | |
| | | | 6000 | 5.44 | TH50/15-115-60 | | | | | | |
| | | | | | | 25 | 0.75 | 3600 | 2.96 | TH50/25-075-36 | |
| | | | 3600 | 4.44 | TH50/25-115-36 | | | | | | |
| | | | | | | 6000 | 7.40 | TH50/25-115-60 | | | |
| | | 35 | 0.75 | 3600 | 3.22 | | | | TH50/35-075-36 | | |
| | | | | | | 6000 | 5.25 | TH50/35-075-60 | | | |
| | | | | | | | | | | 7200 | 6.79 |
| | | | 1.15 | 3600 | 4.93 | | | | TH50/35-115-36 | | |
| | | | | | | 6000 | 8.22 | TH50/35-115-60 | | | |
| | | | | | | | | | | 7200 | 9.87 |
| 50 | 0.75 | 3600 | 4.14 | TH50/50-075-36 | | | | | | | |
| | | | | | 3600 | 6.07 | TH50/50-115-36 | | | | |
| | | | | | | | | 6000 | 10.05 | TH50/50-115-60 | |
| 7200 | 12.06 | TH50/50-115-72 | | | | | | | | | |
| | | | 70 | 19 | 0.75 | 3000 | 2.36 | | | | TH70/19-075-30 |
| | | | | | | | | 75 | 35 | 1.15 | |
| 6000 | 9.72 | TH75/35-115-60 | | | | | | | | | |
| | | | 7200 | 11.67 | TH75/35-115-72 | | | | | | |
| | | | | | | 120 | 35 | 0.75 | 6000 | 8.38 | FSTH120/35-075-60 |
| 7200 | 9.88 | FSTH120/35-075-72 | | | | | | | | | |
| | | | 1.15 | 6000 | 12.61 | | | FSTH120-115-60 | | | |
| 7200 | 15.14 | FSTH120-115-72 | | | | | | | | | |



Top hats can be designed and manufactured to custom dimensions within the following ranges:
 Width: 35mm - 120mm | Height: 15mm - 65mm (lead times apply)
 Please contact our customer service team on 1300 724 505 to discuss your requirements.



• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



external cladding components


top hat cleats

| name | image | width (mm) | bmt (mm) | length (mm) | depth (mm) | approx kg/piece | short code |
|-------------------------------|---|------------|----------|-------------|------------|-----------------|------------|
| top hat cleats 50 (bag of 20) |  | 50 | 2 | 100 | 27 | 0.12 | THC50/27 |
| | | | | | 37 | 0.16 | THC50/37 |
| | | | | | 52 | 0.22 | THC50/52 |
| top hat cleats 75 (bag of 20) |  | 75 | 2 | 100 | 37 | 0.19 | THC75/37 |
| | | | | | 52 | 0.25 | THC75/52 |


strip

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--|--|------------|----------|-------------|-----------------|------------|
| strip façade system horizontal backing |  | 50 | 0.42 | 1190 | 0.28 | FSBS-1190 |
| | | | | 2390 | 0.57 | FSBS-2390 |
| | | | | 2990 | 0.71 | FSBS-2990 |

flash

| name | image | width (mm) | bmt (mm) | length (m) | approx kg/piece | short code |
|-------|---|------------|----------|------------|-----------------|---------------|
| flash |  | 71 | 0.42 | 25 | 6.13 | FSFLASHINGBLK |

accessories

| name | image | width (mm) | bmt (mm) | length (m) | approx kg/piece | short code |
|------------------------------|---|------------|----------|------------|-----------------|------------|
| façade system epdm foam tape |  | 48 | 3 | 25 | 0.25 | FSTAPE |

• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



concealed ceiling systems


concealed ceiling system

Siniat concealed ceiling systems use a variety of robust, lightweight products which are used to create a stable substrate to which various types of boards can then be screw fixed. These systems can be fixed directly to supporting structures or suspended below them.

furring channel

| name | image | depth (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--------------------|--|------------|----------|-------------|-----------------|------------|
| furring channel 18 |  <p>W= 38mm</p> <p>* Curved furring channel available upon request. lead times apply.</p> | 18 | 0.42 | 2400 | 0.74 | FC18-24 |
| | | | | 2700 | 0.83 | FC18-27 |
| | | | | 3000 | 0.92 | FC18-30 |
| | | | | 3600 | 1.10 | FC18-36 |
| | | | | 4800 | 1.47 | FC18-48 |
| | | | | 6000 | 1.84 | FC18-60 |
| furring channel 28 |  <p>W= 38mm</p> | 28 | 0.42 | 2400 | 0.97 | FC28-24 |
| | | | | 2700 | 1.09 | FC28-27 |
| | | | | 2800 | 1.13 | FC28-28 |
| | | | | 3000 | 1.21 | FC28-30 |
| | | | | 3600 | 1.46 | FC28-36 |
| | | | | 4800 | 1.94 | FC28-48 |
| | | | | 6000 | 2.43 | FC28-60 |

furring channel

| name | image | depth (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--------------------------|---|------------|----------|-------------|-----------------|------------|
| furring channel recessed |  | 13 | 0.50 | 6000• | 3.24 | SP333-6000 |

furring channel j-track

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|----------------------------|---|------------|----------|-------------|-----------------|------------|
| furring channel 18 j-track |  | 18 | 0.50 | 3000 | 0.84 | T18-30 |
| furring channel 28 j-track |  | 28 | 0.50 | 3000 | 0.95 | T28-30 |

• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



concealed ceiling systems

furring channel clips

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--|-------|------------|-------------|-------------|-----------------|-------------|
| clip furring channel direct fix 180mm drop (bag of 50) | | 65 | 0.9 | 205 | 0.0947 | C26-180 |
| clip furring channel direct fix 80mm drop (bag of 50) | | 65 | 0.9 | 110 | 0.0478 | C26-80 |
| clip furring channel anchor 7.5mm hole (bag of 50) | | 45 | 1.15 | 67 | 0.0572 | C37-7H |
| clip furring channel anchor 9mm hole (bag of 50) | | 45 | 1.15 | 67 | 0.0572 | C37-9H |
| clip furring channel anchor m6 thread (bag of 50) | | 45 | 1.15 | 70 | 0.0799 | C37-M6 |
| clip furring channel joiner (bag of 50) | | 50 | 1.15 | 100 | 0.0455 | C38 |
| clip furring channel to top cross rail - klik clak (bag of 50) | | 12 | 0.75 | 64 | 0.0291 | C39 |
| clip spring adjustable c26 furring channel (bag of 50) | | 65 | 0.9 / 0.8 | 110 | 0.0117 | C52 |
| clip furring channel to top cross rail swivel clip (bag of 50) | | 52 | 0.75 / 1.15 | 70 | 0.0291 | C79S |
| clip gripclip 6.5mm hole (bag of 50) | | 75 | 1.5 | 29 | 0.040 | CGRIP |
| clip gripclip 9mm hole (bag of 50) | | 75 | 1.5 | 29 | 0.040 | CGRIP-9 |
| clip gripclip long 6.5mm hole (bag of 50) | | 75 | 1.5 | 49 | 0.060 | CGRIP-LONG |
| clip gripclip long 9mm hole (bag of 50) | | 75 | 1.5 | 49 | 0.060 | CGRIP-LONG9 |
| clip furring channel adjustable mount (bag of 50) | | 50 | 0.8 | 25 | 0.0408 | CFCAM |


• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



concealed ceiling systems



wide faced furring channel

| name | image | depth (mm) | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|----------------------------|---|------------|------------|----------|-------------|-----------------|------------|
| wide faced furring channel |  | 28 | 60 | 0.42 | 3600 | 1.80 | FC60/28-36 |
| | | | | | 4800 | 2.39 | FC60/28-48 |
| | | | | | 6000 | 2.99 | FC60/28-60 |

wide faced furring channel clips

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|---|---|------------|----------|-------------|-----------------|------------|
| wide faced furring channel direct fix 80 (bag of 50) |  | 95 | 0.9 | 110 | 0.075 | CW26-80 |
| wide faced furring channel direct fix 180 (bag of 50) |  | 95 | 0.9 | 205 | 0.15 | CW26-180 |
| wide furring channel anchor clip 7.7mm hole (bag of 50) |  | 45 | 1.15 | 95 | 0.09 | CW37-7H |
| wide furring channel anchor clip 9mm hole (bag of 50) |  | 45 | 1.15 | 95 | 0.09 | CW37-9H |
| wide furring channel to top cross rail - klik klak (bag of 50) |  | 13 | 0.75 | 94 | 0.045 | CW39 |

top cross rail

| name | image | depth (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|-------------------|---|------------|----------|-------------|-----------------|------------|
| top cross rail 25 |  | 25 | 0.75 | 3600 | 1.88 | TCR25-36 |
| | | | | 4800 | 2.50 | TCR25-48 |
| | | | | 6000 | 3.13 | TCR25-60 |
| top cross rail 38 |  | 38 | 0.75 | 4800 | 3.23 | TCR38-48 |








• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.









concealed ceiling systems

suspension rod clips

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/ piece | short code |
|--|---|------------|----------|-------------|------------------|------------|
| small cavity suspension rod bracket |  | 25 | 1.15 | 35 | 0.0267 | C25-35 |
| clip suspension rod bracket multi purpose 6mm hole (bag of 50) |  | 25 | 1.15 | 85 | 0.0267 | C47-74 |
| clip suspension rod bracket 9mm hole (bag of 50) |  | 25 | 1.15 | 85 | 0.0267 | C47-749 |
| clip spring adjustable direct fix (bag of 50) |  | 38 | 0.80 | 77 | 0.0325 | C60DF |
| clip spring adjustable direct fix L (bag of 50) |  | 38 | 0.80 | 105 | 0.0325 | C60LDF |
| clip suspension rod bracket flat (bag of 50) |  | 25 | 1.15 | 107 | 0.0267 | C74 |
| clip spring adjustable suspension rod joiner (bag of 50) |  | 25 | 0.8 | 80 | 0.0125 | C54 |

top cross rail clips

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/ piece | short code |
|--|---|------------|----------|-------------|------------------|-------------|
| clip top cross rail direct fix clip - slab (bag of 50) |  | 38 | 0.8 | 60 | 0.029 | C24 |
| clip spring adjustable ac21 to top cross rail clip (bag of 50) |  | 38 | 0.8 | 90 | 0.0325 | C60 |
| clip side mount spring hanger ac21 to tcr (bag of 50) |  | 60 | 0.8 | 52 | 0.03 | C61S |
| clip top cross rail direct fix clip - purlin (bag of 50) |  | 50 | 0.8 | 90 | 0.0303 | C66 |
| clip adj. tcr direct fix 6.5mm hole (bag of 50) |  | 44 | 1.15 | 100 | 0.0710 | CTCR-100 |
| | | | | 200 | 0.1074 | CTCR-200 |
| | | | | 300 | 0.1485 | CTCR-300 |
| clip adj. tcr direct fix m6 (bag of 50) |  | 44 | 1.15 | 100 | 0.0220 | CTCR/M6-100 |

• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



concealed ceiling systems

seismic ceiling components

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|---|-------|------------|----------|-------------|-----------------|------------|
| 45° soffit bracket (bag of 50) | | 35 | 2.0 | 65 | 0.029 | SB45 |
| seismic ceiling bracket (bag of 50) | | 92 | 1.50 | 94.4 | 0.029 | SCB |
| small cavity bracket heavy (bag of 50) | | 96 | 2.0 | 90 | 0.154 | SCB-H |
| universal bracket 80 (bag of 50) | | 80 | 2.0 | 35 | 0.15 | UB80 |

batten

| name | image | depth (mm) | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|-------------------------|-------|------------|------------|----------|-------------|-----------------|------------|
| domestic batten 16 | | 16 | 35 | 0.38 | 4800 | 1.11 | FCDB-48 |
| | | | | | 6000 | 1.39 | FCDB-60 |
| back blocking batten 16 | | 16 | 35 | 0.38 | 300 | 0.07 | FCBBB-0300 |
| cyclonic batten 22 | | 22 | 30 | 0.42 | 6100 | 2.21 | FCCB22-61 |
| batten 35 | | 35 | 35 | 0.42 | 6000• | 2.80 | FCCB35-60 |

batten clips

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--|-------|------------|----------|-------------|-----------------|------------|
| clip domestic batten direct fix 150mm drop (bag of 50) | | 40 | 0.9 | 150 | 0.040 | CDB26-150 |
| clip domestic batten direct fix 80mm drop (bag of 50) | | 40 | 0.9 | 80 | 0.025 | CDB26-80 |
| clip domestic batten anchor clip (bag of 50) | | 37 | 0.8 | 50 | 0.0293 | CDB37 |
| clip domestic batten joiner (bag of 50) | | 34 | 0.55 | 110 | 0.0328 | CDB38 |
| clip domestic batten to top cross rail (bag of 50) | | 20 | 1.15 | 50 | 0.0267 | CDB39 |




• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.







concealed ceiling systems

miscellaneous clips

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|---|---|------------|----------|-------------|-----------------|------------|
| clip encasement clip (bag of 50) |  | 50 | 0.5 | 20 | 0.022 | C.ENCAS |
| clip staggered stud clip (bag of 50) |  | 3 | n/a | 30 | 0.02 | C126 |
| clip wall angle bracket (bag of 50) |  | 15 | 0.8 | 45 | 0.0146 | C88 |

fixings

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--|---|---|----------|-------------|-----------------|------------|
| 6x60mm suspension rod anchor (box of 100) |  | 6 | n/a | 60 | 0.01 | CTP60 |
| 80mm tap in anchor (box of 100) |  | 6 | n/a | 80 | 0.018 | CTP80 |
| 6x120mm tap in anchor (box of 50) | | 6 | n/a | 120 | 0.024 | CTP120 |
| 6x150mm tap in anchor (box of 50) | | 6 | n/a | 150 | 0.06 | CTP150 |
| 6x180mm tap in anchor (box of 100) | | 6 | n/a | 180 | 2.0 | CTP180 |
| nuts (box of 100) | |  | 9 | M6 | 9 | 0.0045 |
| suspension rod 5 |  | 5 | 5 | 3600 | 0.5593 | C21-3600 |
| | | | | 4000• | 0.6533 | C21-4000 |
| | | | | 6000• | 0.9322 | C21-6000 |

• Minimum order quantities and lead times may apply.




Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



acoustic clips

acoustic clips

Siniat's acoustic resilient clips come with specifically engineered rubber pads for noise reduction. They are used with top cross rail and furring channel in concealed ceiling systems and walls, and help to reduce friction noise originating in the system.

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|---|---|------------|----------|-------------|-----------------|-------------|
| clip fc resilient mount 6.5mm hole (bag of 50) |  | 40 | 1.15 | 80 | 0.0572 | C001 |
| clip fc resilient mount threaded M6 (bag of 50) |  | 40 | 1.15 | 80 | 0.0572 | C001M6 |
| clip purlin direct fix clip to fc (bag of 50) |  | 35 | 1.15 | 130• | 0.13 | C001-PC |
| clip tcr to fc resilient (bag of 50) |  | 40 | 1.15 | 80 | 0.0350 | C79SRES |
| clip gripclip resilient (bag of 50) |  | 75 | 1.5 | 40• | 0.085 | CGRIP-RES |
| clip fc adjustable resilient mount 6.5mm hole (bag of 50) |  | 25 | 0.8 | 25• | 0.0388 | CFCRESAM |
| clip adj tcr resilient 6.5mm hole (bag of 50) |  | 30 | 1.15 | 100• | 0.07 | CTCRRES-100 |
| | | | | 300• | 0.144 | CTCRRES-300 |
| clip isolation hanger (bag of 50) |  | n/a | n/a | n/a• | 0.03 | CRAIH |

• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



beads & angles

beads & angles

Siniat offers a wide range of quality plaster finishing sections to suit various applications. Siniat beads and angles have been designed to meet a variety of common and specified requirements and applications such as corners, archways, shadow lines and expansion joints.

steel angles

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--------------------|-------|------------|----------|-------------|-----------------|------------|
| external angle 90 | | 30 | 0.38 | 1820• | 0.2552 | P90EX1820 |
| | | | | 2120• | 0.2972 | P90EX2120 |
| | | | | 2400 | 0.3362 | P90EX24 |
| | | | | 2550• | 0.3572 | P90EX2550 |
| | | | | 2700 | 0.3782 | P90EX27 |
| | | | | 3000 | 0.4203 | P90EX30 |
| | | | | 3600 | 0.5043 | P90EX36 |
| external angle 135 | | 30 | 0.38 | 2400 | 0.3362 | P135EX24 |
| | | | | 2700 | 0.3782 | P135EX27 |
| | | | | 3000 | 0.4203 | P135EX30 |
| | | | | 3600• | 0.5043 | P135EX36 |
| internal angle 90 | | 30 | 0.38 | 2400 | 0.3362 | P90INT24 |
| | | | | 2700 | 0.3782 | P90INT27 |
| | | | | 3000 | 0.4203 | P90INT30 |
| | | | | 3600 | 0.5043 | P90INT36 |
| internal angle 135 | | 30 | 0.38 | 2400 | 0.3362 | P135INT24 |
| | | | | 2700 | 0.3782 | P135INT27 |
| | | | | 3000 | 0.4203 | P135INT30 |
| | | | | 3600• | 0.5043 | P135INT36 |



• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.





beads & angles


stopping angles

| name | image | depth (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|---------------------------|---|------------|----------|-------------|-----------------|------------|
| stopping angle |  | 10 | 0.38 | 3000 | 0.2961 | PSA1030 |
| | | 13 | | | 0.2961 | PSA1330 |
| | | 16 | | | 0.3479 | PSA1630 |
| | | 20 | | | 0.3479 | PSA2030 |
| shadowline stopping angle |  | 6 | 0.30 | 3000• | 0.30 | PSASL0630 |
| | | 10 | 0.38 | 3000 | 0.34 | PSASL1030 |

bead

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|---------------|---|------------|----------|-------------|-----------------|------------|
| stopping bead |  | 10 | 0.5 | 3000 | 0.6519 | PSB1030 |
| | | 13 | | 3000 | 0.6519 | PSB1330 |
| | | 16 | | 3000• | 0.6519 | PSB1630 |
| casing bead |  | 6 | 0.5 | 3000• | 0.5667 | PCB0630 |
| | | 10 | | 3000 | 0.5903 | PCB1030 |
| | | 13 | | 3000 | 0.6258 | PCB1330 |
| | | 16 | | 3000• | 0.6258 | PCB1630 |

archway bead

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--------------|---|------------|----------|-------------|-----------------|------------|
| archway bead |  | 30 | 0.38 | 3000 | 0.1583 | PAWB30 |


• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.




beads & angles


backing angle
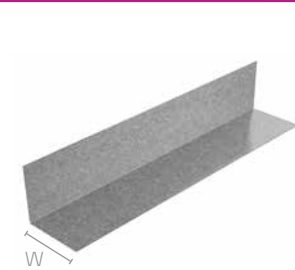
| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|---------------|---|------------|----------|--------------|-----------------|-------------|
| backing angle |  | 35 | 0.7 | 3000 | 1.2855 | BA35-070-30 |
| | | | | 3600 | 1.5426 | BA35-070-36 |
| | | 50 | | 3000 | 1.8364 | BA50-070-30 |
| | | | | 3600 | 2.204 | BA50-070-36 |
| | | 50 | 1.15 | 3000 | 2.7784 | BA50-115-30 |
| | | 75 | | 3000 | 4.2210 | BA75-115-30 |
| 100 | 3000 | 5.6090 | | BA100-115-30 | | |

utility angle

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|---------------|---|------------|----------|-------------|-----------------|-------------|
| utility angle |  | 28 | 0.3 | 2400 | 0.3354 | BA28-030-24 |
| | | | | 2700 | 0.3771 | BA28-030-27 |
| | | 40 | | 1800 | 0.3391 | BA40-030-18 |

slotted angle
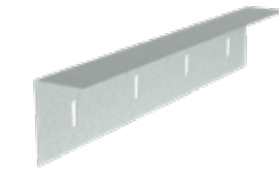
| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--------------------|---|------------|----------|-------------|-----------------|-----------------|
| slotted back angle |  | 50 | 0.75 | 2400 | 1.467 | SBA50/50-075-24 |
| | | 75 | 1.15 | 2400 | 2.692 | SBA75/50-115-24 |


• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



beads & angles

reveal angles

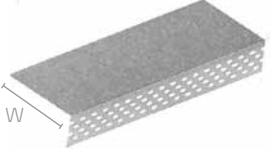
| name | image | width (mm) | bmt (mm) | length (mm) | short code |
|--------------|---|------------|----------|-------------|------------|
| reveal angle |  | 20 | 0.75 | 3000 | PLRA2030 |
| | | 25 | | 3000 | PLRA2530 |
| | | 30 | | 3000 | PLRA3030 |
| | | 35 | | 3000 | PLRA3530 |
| | | | | 3600• | PLRA3536 |
| | | 40 | | 3000 | PLRA4030 |
| | | | | 3600• | PLRA4036 |
| | | 45 | | 3000 | PLRA4530 |
| | | | | 3600• | PLRA4536 |
| | | 50 | | 3000 | PLRA5030 |
| | | | | 3600• | PLRA5036 |
| | | 60 | | 3000 | PLRA6030 |
| | | | | 3600• | PLRA6036 |
| | | 65 | | 3000 | PLRA6530 |
| | | | | 3600• | PLRA6536 |
| | | 75 | | 3000 | PLRA7530 |
| 3600• | PLRA7536 | | | | |
| 80 | 3000 | PLRA8030 | | | |
| | 3600• | PLRA8036 | | | |
| 90 | 3000 | PLRA9030 | | | |
| | 3600• | PLRA9036 | | | |

• Minimum order quantities and lead times may apply.


Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.

beads & angles


reveal angles
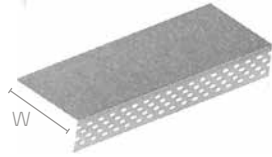
| name | image | width (mm) | bmt (mm) | length (mm) | short code |
|--------------|---|------------|----------|-------------|------------|
| reveal angle |  | 100 | 0.75 | 3000 | PLRA10030 |
| | | | | 3600• | PLRA10036 |
| | | 110 | | 3000 | PLRA11030 |
| | | 120 | | 3000 | PLRA12030 |
| | | 135 | | 3000 | PLRA13530 |
| | | 150 | | 3000 | PLRA15030 |
| | | | | 3600• | PLRA15036 |

pvc angles

| name | image | width (mm) | gauge (mm) | length (mm) | approx kg/piece | short code |
|---|---|------------|------------|-------------|-----------------|------------|
| pvc angle 90° external (pack of 50) |  | 32 | 1.2 | 2400 | 0.24 | PVCP90EX24 |
| | | | | 2700 | 0.27 | PVCP90EX27 |
| | | | | 3000 | 0.30 | PVCP90EX30 |

pvc expansion joint

| name | image | width (mm) | gauge (mm) | length (mm) | approx kg/piece | short code |
|-------------------------------------|---|------------|------------|-------------|-----------------|------------|
| pvc expansion joint (pack of 50) |  | 73 | 1.2 | 3000 | 0.35 | PVCXJ30 |



• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.




beads & angles

pvc tearaway bead

| name | image | width (mm) | gauge (mm) | length (mm) | approx kg/piece | short code |
|--|---|------------|------------|-------------|-----------------|-------------------|
| tearaway bead 10mm (pack of 50) |  | 32 | 1.2 | 3000 | 0.30 | PVCTAWAYBD10/30 |
| tearaway bead shadowline 10mm (pack of 50) |  | | | 3000• | 0.30 | PVCTAWAYBD10/30SL |


pvc render bead

| name | image | width (mm) | gauge (mm) | length (mm) | approx kg/piece | short code |
|--|--|------------|------------|-------------|-----------------|-----------------|
| external render trim bead 2.5mm (pack of 50) |  | 32 | 1.2 | 3000 | 0.32 | PVCTRIMEX2.5/30 |
| external render trim bead 3.5mm (pack of 50) | | | | 3000 | 0.33 | PVCTRIMEX3.5/30 |

pvc casing bead

| name | image | width (mm) | gauge (mm) | length (mm) | approx kg/piece | short code |
|-------------------------------|---|------------|------------|-------------|-----------------|------------|
| casing bead 10mm (pack of 50) |  | 10 | 1.2 | 2400 | 0.24 | PVCCB10-24 |
| | | | | 3000 | 0.30 | PVCCB10-30 |
| casing bead 13mm (pack of 50) |  | 13 | 1.2 | 2400• | 0.24 | PVCCB13-24 |
| | | | | 3000• | 0.30 | PVCCB13-30 |

pvc capping

| name | image | width (mm) | gauge (mm) | length (mm) | approx kg/piece | short code |
|------------------------------------|---|------------|------------|-------------|-----------------|------------|
| external capping 20mm (pack of 50) |  | 20 | 1.2 | 2400 | 0.24 | PVCCA20-24 |
| external capping 25mm (pack of 50) | | 25 | | 2400 | 0.24 | PVCCA25-24 |


• Minimum order quantities and lead times may apply.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.

interhome framing systems

interhome framing systems

Interhome is a separating wall system that contains a central fire barrier built between timber or steel house frames. Interhome offers easier installation because it allows non-fire rated installation of internal linings and non-fire rated penetrations of the wall linings during construction. Interhome is available for both low-rise and high-rise projects.

| name | image | width (mm) | bmt (mm) | length (mm) | approx kg/piece | short code |
|--------------------------------------|---|------------|----------|-------------|-----------------|-----------------|
| interhome h-stud |  | 28 | 0.55 | 3000 | 1.83 | IHS25-30 |
| | | | | 3600• | 1.90 | IHS25-36 |
| furring channel j-track |  | 28 | 0.50 | 3000 | 0.95 | T28-30 |
| interhome aluminium clip (bag of 50) |  | 40 | 1.6 | 80 | 0.02 | CIH-L |
| slotted back angle |  | 50 | 0.75 | 3000 | 1.501 | SBA50/35-075-30 |
| backing angle* |  | 35 | 0.7 | 3000 | 1.2855 | BA35-070-30 |
| | | | | 3600 | 1.5426 | BA35-070-36 |

*interhome high-rise only

• Minimum order quantities and lead times may apply.



Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



access panels

access panels

Siniat offers a range of access panels including lightweight steel doors in standard and special size panels to suit individual project requirements. Our access panels have a sturdy lightweight steel frame and concealed hinges.

| name | image | width (mm) | length (mm) | approx kg/piece | short code |
|---|---|------------|-------------|-----------------|------------|
| metal door set bead |  | 200 | 200 | 1 | APMDSB20 |
| | | 300 | 300 | 1.5 | APMDSB30 |
| | | 450 | 450 | 3 | APMDSB45 |
| | | 530 | 530 | 4 | APMDSB53 |
| | | 600 | 600 | 5 | APMDSB60 |
| metal door flanged |  | 200 | 200 | 1 | APMDFL20 |
| | | 300 | 300 | 1.5 | APMDFL30 |
| | | 450 | 450 | 3 | APMDFL45 |
| | | 530 | 530 | 4 | APMDFL53 |
| | | 600 | 600 | 5 | APMDFL60 |
| chameleon access panels (plasterboard infill) |  | 600 | 600 | 5 | NA |



plasterboard

mastashield

mastashield is a standard plasterboard for internal wall linings and ceilings and suits a wide range of standard applications.

- Lightweight lining
- Economical solution

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|-----------------|---------------------------------------|---------------------------------------|------------------------------|
| 10 [^] | 1200 | 2400 2700 3000 3600 4200 4800 6000 | 5.9 |
| | 1275 | 6000 | |
| 13 | 1350 | 2400 2700 3000 3600 4200 4800 6000 | 8.2 |
| | 1200 | 2400 2700 3000 3600 4800 6000 | |
| | | 1350 | |
| | 1370 [^] / 1400 [^] | 3000 3600 | |

spanshield

spanshield is a 10mm reinforced plasterboard suitable for walls and ceilings. It is designed to span internal ceiling joists or furring channels up to 600mm without sagging.

- Sag resistant ceiling solution
- Lightweight ceiling lining
- Suitable for walls and ceilings

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|----------------|------------------|--|------------------------------|
| 10 | 900 [^] | 3600 4800 6000 | 6.2 |
| | 1200 | 2400 [^] 2700 [^] 3000 [^] 3600 4200 4800 6000 | |
| | | 1350 | |



watershield

watershield is a water-resistant plasterboard suitable for use in internal wet areas and as a substrate for tiles.

- Non-hazardous moisture-resistant solution
- Building Code compliant as a tile substrate in wet areas

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|----------------|-------------------|---|------------------------------|
| 10 | 1200 | 2400 2700 3000 3600 4200 6000 [^] | 7.5 |
| | 1350 | 3000 [^] 3600 [^] 4800 6000 [^] | |
| 13 | 1200 | 2700 [^] 3000 3600 [^] | 9.6 |
| | 1350 [^] | 3000 | |



soundshield

soundshield is a plasterboard with a high density core providing excellent sound insulation for residential and commercial applications. Used in wall and ceiling systems, **soundshield** provides superior levels of sound resistance.

- Superior sound resistance
- Reduces noise transfer between rooms

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|-----------------|------------|------------------------|------------------------------|
| 10 [^] | 1200 | 3600 6000 | 8.4 |
| | 1350 | 3600 6000 | |
| 13 [^] | 1200 | 3000 3600 [^] | 12.3 |
| | 1350 | 3600 [^] | |

Plasterboard dimensions shown above may not be available in all locations.

Special sizes and other edge types available, minimum order quantity and lead times may apply.

*Weights indicated are nominal.

[^]Not available in all locations - please refer to your supplier for all available sizes in your region.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



plasterboard



Photo by Oak & Orange



fireshield

fireshield is a fire-resistant plasterboard for internal lining applications where a Fire Resistance Level (FRL) is required.

- Fire-resistant solution
- Good sound insulation

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|----------------|-------------------|---|------------------------------|
| 13 | 1200 | 2700 [^] 3000 3600 | 10.5 |
| | 1350 [^] | 3000 3600 | |
| 16 | 1200 | 2400 [^] 2700 [^] 3000 3600 | 13.0 |
| | 1350 [^] | 3000 3600 | |



intershield

intershield is a 25mm fire-resistant plasterboard that has been formulated to resist sound and fire as well as providing enhanced water and mould resistance capabilities.

intershield is suitable for use in Shaftwall and Interhome systems.

- Fire resistant
- Mould resistant
- Water resistant
- **intershield** can substitute **shaftliner** in any Siniat system and maintain fire and acoustic performance

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|----------------|------------|-------------|------------------------------|
| 25 | 600 | 3000 3600 | 21.3 |

Plasterboard dimensions shown above may not be available in all locations.

Special sizes and other edge types available, minimum order quantity and lead times may apply.

*Weights indicated are nominal.

[^]Not available in all locations - please refer to your supplier for all available sizes in your region.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.

plasterboard



curveshield

curveshield is a thin flexible plasterboard that can be used to create curved walls and ceilings.

- Design solution for concave and convex surfaces

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|----------------|------------|-------------|------------------------------|
| 6.5 | 1200 | 3600 | 4.6 |



opal



opal is a high-performing and carbon neutral plasterboard for walls and ceilings that incorporates impact resistance and superior sound insulation properties.

opal comes carbon neutral as standard. It offers a smooth, white premium finish for walls and ceilings.

- Reduce transfer of sound between rooms to improve indoor environment quality
- Design beautiful spaces with a smooth premium finish
- Superior impact resistance
- Certified carbon neutral by Climate Active

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|-----------------|------------|----------------|------------------------------|
| 10 [^] | 1200 | 4800 6000 | 8.4 |
| | 1350 | 4200 4800 6000 | |



Plasterboard dimensions shown above may not be available in all locations.

Special sizes and other edge types available, minimum order quantity and lead times may apply.

*Weights indicated are nominal.

[^]Not available in all locations - please refer to your supplier for all available sizes in your region.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



plasterboard



impactshield

impactshield is an impact-resistant plasterboard with fire-resistant and excellent acoustic properties. It is designed to meet impact needs in demanding commercial environments like hospital and school corridors.

- Impact resistant
- Fire resistant
- Good acoustic performance

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|----------------|------------|-------------------------------------|------------------------------|
| 13 | 1200 | 3000 [^] 3600 [^] | 11.8 |
| | 1370 | Custom [^] | |



multishield

multishield is a plasterboard with mould inhibitor and the combined benefits and properties of **fireshield** and **watershield**. It is suitable for use in wet areas and external walls behind cladding where an FRL (Fire Resistance Level) is required.

- Single lining solution avoiding extra layers
- Fire and water resistant with good sound-insulating properties
- Contains a powerful mould inhibitor

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|-----------------|------------|-------------|------------------------------|
| 13 [^] | 1200 | 3000 3600 | 10.7 |
| | 1350 | 3000 | |
| 16 [^] | 1200 | 3000 3600 | 13.0 |
| | 1350 | 3000 3600 | |



trurock

trurock is the lining of choice for high performance commercial construction. Incorporating mould, impact, water, and fire resistance as well as sound insulating properties. Durable and easy to handle, **trurock** is economical and ideal for multi-purpose applications.

- Perfect all-round solution
- 5-in-1 all-round plasterboard
- Impact, fire, water, and mould resistant with excellent sound insulating properties

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|----------------|-------------------|------------------------|------------------------------|
| 13 | 1200 | 3000 3600 [^] | 12.3 |
| | 1350 [^] | 4200 | |
| 16 | 1200 | 3000 | 14.8 |



trurock hd

trurock hd has the added benefit of enhanced impact performance.

In addition to its heavy duty paper, **trurock hd** has a continuous fibreglass mesh embedded in the high density core limiting damage even under large impact forces.

trurock hd provides premium impact protection.

- Premium all-round solution
- Mould resistance and high performance impact resistance
- Mould, impact, fire, and water resistant with excellent sound insulating properties

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|-----------------|------------|-------------|------------------------------|
| 13 [^] | 1200 | 3000 3600 | 12.3 |

Plasterboard dimensions shown above may not be available in all locations.

Special sizes and other edge types available, minimum order quantity and lead times may apply.

*Weights indicated are nominal.

[^]Not available in all locations - please refer to your supplier for all available sizes in your region.

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.

cornice






classiclook

- Simple curved profile
- Clean finish
- Suits all decors




| profile (mm) | length (mm) |
|--------------|-------------|
| 55, 75, 90 | 3000 – 5400 |






reeflook

- Elegant soft curved profile
- Adds a smooth and relaxing style




| profile (mm) | length (mm) |
|--------------|-------------|
| 75 | 4800 |






steplook

- Contemporary 2 and 3 step profile
- Adds depth, edge and dimension




| profile (mm) | length (mm) |
|--|-------------|
| 55 (steplook 2) 75 (steplook 3) | 4800 |

oceanlook

- Bold curves and smooth profile
- Can be retrofitted over existing 55mm cornice



| profile (mm) | length (mm) |
|--------------|-------------|
| 88 | 4800 |





system warranty

An overhead photograph of three construction professionals in a meeting. One person is wearing a white hard hat. They are gathered around a table with a tablet, a smartphone, and some papers. The background shows a wall with a grid of pink laser lines. A large white circle is positioned in the upper right area of the image.

the safety net for ultimate peace of mind



Many manufacturers offer 10 year product warranties, but the Siniat warranty takes this to a whole new level.

Not only do we guarantee our Siniat products, but our advanced system engineering and rigorous testing regimes gives us the confidence to offer you a warranty that can cover the whole wall and ceiling systems.

So when you install Siniat products as a complete system in accordance to our recommendations, you have the ultimate peace of mind knowing that you are covered by the Siniat warranty.

Let's build better, together.

To find out more about enjoying the ultimate peace of mind, visit: siniat.com.au/warranty

bedding cements

mastabase

mastabase is a plaster-based cement for bedding tape and second coating all plasterboard joints. It has a working time of 45 minutes and a setting time of 60 minutes.

- High joint strength
- Easy to scrape back
- Quick drying

10 kg bag

20 kg bag



mastalongset

mastalongset is a plaster-based cement for bedding tape and second coating all plasterboard joints. It has a working time of around 65 minutes, and an extended setting time of 80 minutes, making it ideal for mechanical tools.

- High joint strength
- Easy to scrape back
- Longer working time

20 kg bag



mastatape-in

mastatape-in is a ready-to-use air drying compound for bedding tape into recessed edges and butt joints for plasterboard systems. It is also suitable for second coating joints, for internal and external angles as well as fastener heads. When using mechanical taping and setting tools, **mastatape-in** is ideal as it reduces time spent cleaning and mixing. Perfect for projects where access to water is limited.

- Fast application
- Strong tape bond
- Minimal water required

20 kg bucket



finishing compounds

mastaglide

mastaglide is a premixed air drying heavy-weight compound designed for the final coat over plasterboard joints and fastener heads. Suitable for both hand trowelling and mechanical tools, **mastaglide** can be used over **mastabase** and **mastalongset** bedding cements.

- Smooth trowelling
- Great sanding
- Low shrinkage

20 kg bucket





jointing compounds

mastaline

mastaline is a premixed jointing compound formulated to perform in all phases of jointing and fasteners and finishing. **mastaline** can also be applied as a final coat over **mastabase**, **mastalongset** or **mastatape-in**.

- All-purpose
- Premixed for easy use

20 kg bucket



box ready mastaline

box ready mastaline is a premixed all-purpose compound that can be applied with automatic tools immediately from the bucket - no mixing required. It can be used interchangeably with standard **mastaline** whenever automatic tools such as a box or taping tool are used.

- No need to add water
- Ready to use with mechanical tools
- Premixed for easy use and speed

20 kg bucket



mastalite

mastalite is a premium premixed all-purpose jointing compound suitable for bedding tape, second and final coating of plasterboard joints and fastener heads.

- Good body
- Easy sanding
- Free flowing

17 kg bucket



mastacoat3

mastacoat3 is an all-purpose jointing compound suitable for bedding tape, second and final coating plasterboard joints. It is ideal in renovations and smaller jobs.

- Premixed for easy use
- Easy to clean off
- Minimal wastage

4 kg bucket



createx® jointing compound

Siniat set

Siniat set is a plaster based cement specifically developed for filling joints in the **createx®** system. **Siniat set** is a setting cement providing a strong resistant joint. It has a consistent working time of 45 minutes with a 60 minute setting time.

- High joint strength
- Mixes easily to a creamy consistency
- Stabilised set

10 kg bag



speciality compounds

mastablock

mastablock is a pink plaster-based cement designed specifically for back-blocking ceiling and wall joints in accordance with Australian Standard 2589.1 **mastablock** has a working time of 3.5 hours.

- Strengthens joints
- Minimises joint cracking
- Long setting time

20 kg bag



mastafix20

mastafix20 is a versatile 3-in-1 cement with a setting time of 20 minutes. Ideal for patching and fixing cornice, **mastafix20** also performs well as a bedding cement.

- For patching, corncicing and jointing
- Sets quickly
- Easy to work with

10 kg bag



cornice cement

mastacove45

mastacove45 is a plaster-based cornice cement. With a setting time of 45 minutes, it is ideal for all corncicing applications.

- Mixes easily to a creamy consistency
- Sets evenly
- Excellent workback

20 kg bag



mastacove75

mastacove75 is a plaster-based cornice cement. With a setting time of 75 minutes, it is suitable for large corncicing jobs.

- Mixes easily to a creamy consistency
- Stabilised set
- Extended working time

20 kg bag





adhesives

mastabond

mastabond is a plaster-based cement for adhering plasterboard to masonry surfaces.

- Excellent grab
- Easy to mix
- Easy to apply

20 kg bag



mastagrip

mastagrip is an acrylic stud adhesive for adhering plasterboard to timber and metal frames in conjunction with screws or nails.

- Complies with AS 2753:2018
- Sticks to treated timbers
- Fast tack

600 ml foil tube

1.25 kg bucket

5.2 kg bucket



sealants

bindex fire and acoustic sealant

bindex fire and acoustic sealant is an acrylic-based sealant designed to stop sound, smoke and fire from passing through gaps in fire-rated walls. It has been fire tested in to AS1530.4 for control joints, perimeter seals and penetration seals around cables and metal pipes.

- Water wash up
- Compatible with Siniat systems
- Low VOC



Weather Defence®

Weather Defence rigid air barrier board and Weather Defence screws.



Weather Defence®

Siniat **Weather Defence** is a rigid air barrier which is used behind facade cladding systems to create a pressure equalised cavity. It has transformed building envelope construction and performance.

- Rigid air barrier with Class 4 vapour permeance. Recommended for use in Climate Zones 2 to 8.
- Can be left unexposed to weather for up to 12 months during construction
- Enclose buildings faster so the interior fitout can start sooner
- When used in a system, provides a Fire Resistance Level of up to -/120/120 when required by the Building Code of Australia

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|----------------|------------|-------------|------------------------------|
| 13 | 1200 | 2400 | 11.7 |

* Weights indicated are nominal

Weather Defence® screws

Weather Defence screws supplied by Siniat come in three sizes - 25mm, 38mm and 42 mm.

The 25mm collated and 38mm loose fine thread drill point **Weather Defence** screws are used for the installation of **Weather Defence** on metal framing and the 42mm coarse thread needle point **Weather Defence** screw is for timber application.

Weather Defence screws come with a distinctive purple corrosion resistant coating.



| gauge | length (mm) | application |
|-------|-------------|-------------|
| 6 | 25 | steel |
| | 38 | |
| | 42 | timber |



Siniat x-ray shielding system

GIB x-block® plasterboard and GIB x-block® jointing compound installed together.



GIB x-block®

GIB x-block® is a unique lead-free plasterboard designed to provide X-ray radiation protection in X-ray diagnostic rooms within medical facilities and dental clinics. It must be installed in conjunction with the Siniat X-ray shielding system using GIB x-block® jointing compound.

- Lead-free X-ray shielding solution
- Easy to use compared with lead-based lining solutions

| thickness (mm) | width (mm) | length (mm) | weight* (kg/m ²) |
|----------------|------------|-------------|------------------------------|
| 13 | 1200 | 3000 | 17.3 |

*Weights indicated are nominal

GIB x-block® jointing compound

GIB x-block® jointing compound has been specifically formulated to give lead equivalent joints on walls and ceilings when using GIB x-block® plasterboard. An air drying powder compound, it must be used for the first and second coats of X-Block systems, completely filling the recess.

- X-ray shielding solution
- Lead free
- Easy to use compared with traditional installation procedures

25 kg bag




interhome and interhome high-rise

shaftliner and **intershield** panels can be used with the **interhome** systems.

interhome


interhome is a separating wall system suitable for adjoining residential dwellings such as duplexes or townhouses. **interhome** has been designed to satisfy the fire safety and sound insulation requirements of the National Construction Code (NCC) for separating walls.

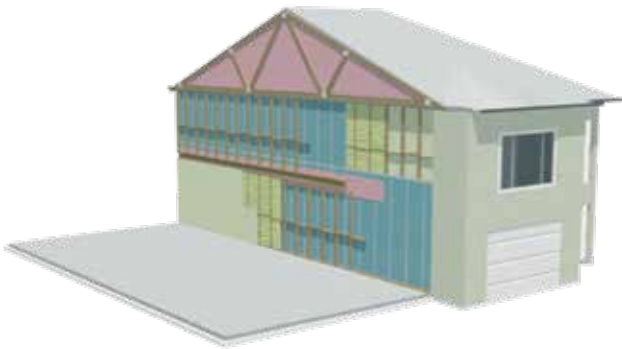

slotted angle

The Siniat **slotted angle** is used to secure H-Studs under a soffit when the **interhome** system is installed between slabs. It allows slab deflection and easy installation of **shaftliner** panels.

- **interhome** for high-rise apartments
- Easy installation of H-Studs and **shaftliner**

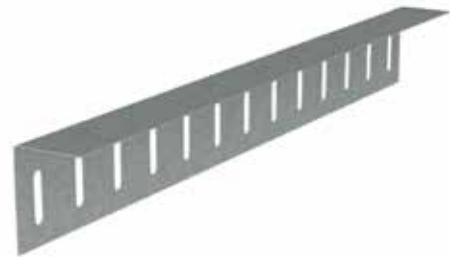

interhome h-stud

The **interhome h-stud** must be used in the **interhome** system to support 25mm **shaftliner** or **intershield** in the central fire barrier of **interhome** systems.


- Easy to use
- Cost-effective solution



| quantity per pallet (studs) | length per stud (m) | bmt or gauge (mm) |
|-----------------------------|---------------------|-------------------|
| 100 | 3.0, 3.6 | 0.55 BMT |

interhome aluminium clip

The **interhome aluminium clip** forms an integral part of the **interhome** system. Installed to support the central fire barrier, it must be used to maintain the fire performance of the system with 2 screws per face.



| quantity per bag (clips) | quantity per box (bags) | thickness (mm) |
|--------------------------|-------------------------|----------------|
| 150 | 6 | 1.6 |

Opt-in for carbon neutral products, certified by Climate Active, under Siniat's Opt2Act program.



createx[®] system


acoustic lining wall and ceiling system



Siniat **set** is a plaster-based cement specifically developed for filling joints in the createx[®] system without the need for tape to create seamless joints between the createx[®] board edges.



The **chameleon[®]** access panel comes standard with an unperforated piece of regular plasterboard. To maintain a seamless finish over access points in a createx[®] ceiling system, the board can be removed and replaced with the appropriate createx[®] acoustic perforated pattern.




V Edge Section




createx[®]


createx provides excellent sound absorption properties for superior acoustic comfort. Suitable for both walls and ceilings, the continuous perforations in createx create a seamless appearance. The V edge makes easy application possible. Together with Siniat Wide Face Furring Channel and matching clips, createx comes as a complete Siniat system. When installed in accordance with our recommendations, the createx system qualifies for the Siniat Warranty that covers not only the individual products but the whole system. The built-in air purifying CAPT'AIR[®] technology improves indoor air quality, resulting in a comfortable and healthy environment.




round R8/18




round R12/25



cube C12/25



dynamic D8-12



space S8-15-20

| design | perforation pattern | perforation ratio (%) | absorption | | board dimensions | | edge type |
|--|---------------------|-----------------------|------------|-----------|------------------|-------------|-------------------|
| | | | α_w | NRC | width (mm) | length (mm) | V edge on 4 sides |
| infinity collection - standard perforation patterns | | | | | | | |
| round | R8/18 | 14.3 | 0.7 | 0.7-0.85 | 1200 | 1988 | • |
| round | R12/25 | 18.2 | 0.7-0.8 | 0.75-0.85 | | 2000 | • |
| cube | C12/25 | 23.1 | 0.7-0.9 | 0.8-0.9 | | 2000 | • |
| dynamic | D8-12 | 13.1 | 0.35-0.7 | 0.5-0.8 | | 2000 | • |
| space | S8-15-20 | 10.2 | 0.5-0.6 | 0.6-0.65 | | 1950 | • |


creason® system

acoustic lining wall and ceiling system




creason®

creason is suitable for internal application only, and mostly used in ceilings. The board can however also be used on the top of internal walls (above traffic areas) where control of sound absorption and reverberation time is required. creason is ideal for ceilings in high traffic commercial areas and can also be used in residential applications such as open plan living areas and home theatres for the ultimate acoustic comfort. Boards come with two longitudinal tapered edges and two transversal squared edges for easy installation.

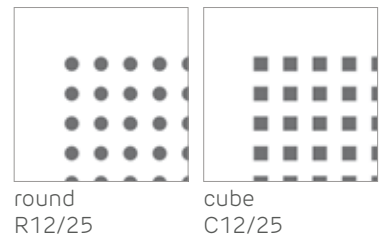

| design | perforation pattern | perforation ratio (%) | absorption | | board dimensions | | edge type |
|--|---------------------|-----------------------|------------|----------|------------------|-------------|-----------------|
| | | | α_w | NRC | width (mm) | length (mm) | 2 sides tapered |
| matrix collection - standard perforation patterns | | | | | | | |
| round | R12/25 no.8 | 10.2 | 0.5-0.55 | 0.6 | 1200 | 2400 | • |
| cube | C12/25 no.8 | 16.1 | 0.6-0.75 | 0.65-0.8 | | | • |

One login.
One hub.
One space for
everything
you need.

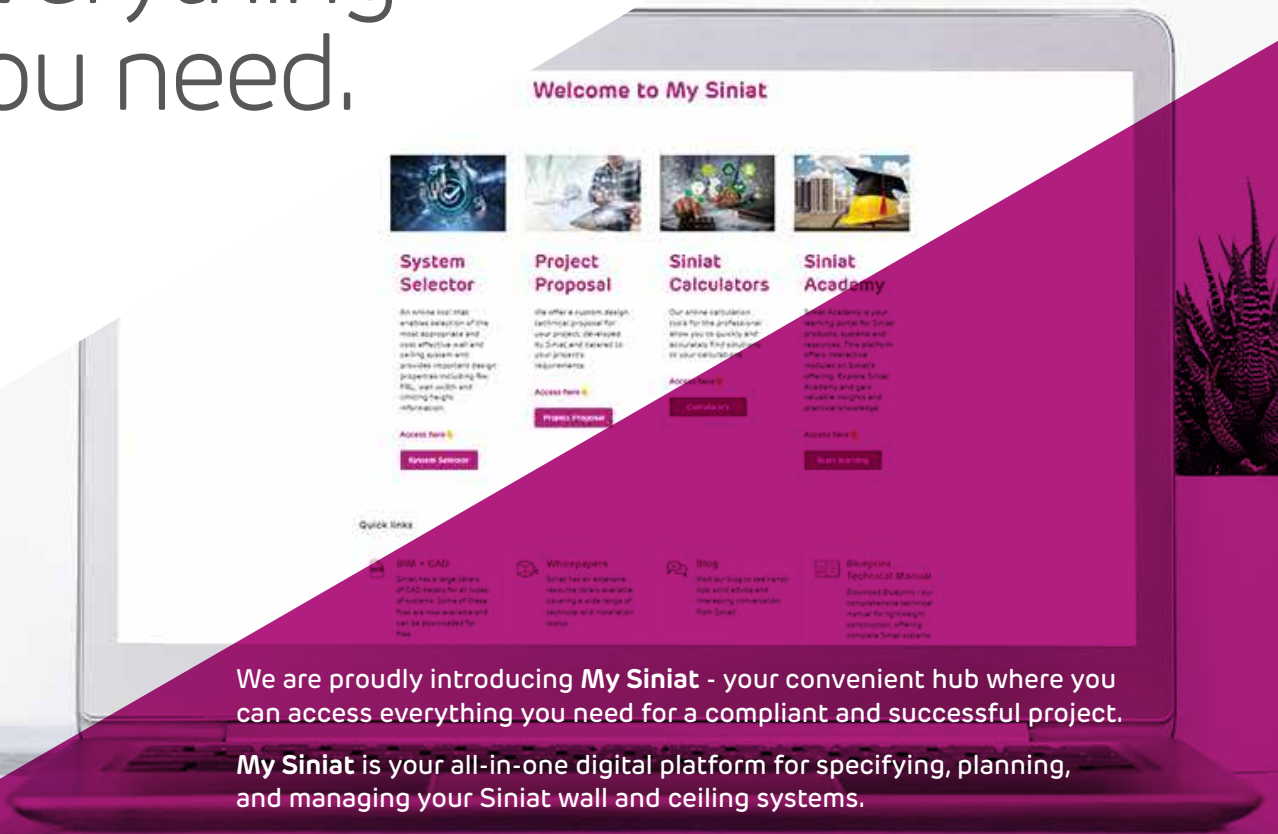

46

We are proudly introducing **My Siniat** - your convenient hub where you can access everything you need for a compliant and successful project.

My Siniat is your all-in-one digital platform for specifying, planning, and managing your Siniat wall and ceiling systems.

By registering for this platform, you will gain exclusive access to technical content, including System Selector, Project Proposal and our BIM and CAD Library. You will also have easy access to our virtual library of whitepapers and blogs.

One of the most exciting features of **My Siniat** is the new Siniat Academy, available exclusively **My Siniat**. It is a valuable training portal to learn more about our products and their applications. Courses are delivered in a fun and interactive way and a certificate of completion is provided at the end of each course. Enrich your knowledge and expertise with us!

We will continue to add courses to our Siniat Academy offering and will let you know when new ones become available.

Register for **My Siniat** by scanning the QR code and complete the form. Your request will be reviewed within 48 hours. Once approved you will receive an email with instructions to setting up your account.





Etex Australia Pty Ltd

ABN 61 003 621 010
31 Military Road, Matraville
NSW 2036

siniat.com.au



warranty

Siniat's products are guaranteed
by a 10 Year Warranty.
For details visit siniat.com.au/warranty

technical advice
AU 1300 724 505